


Peerless® Fixture Options

General Options

- DL** Damp Location label. Fixtures will be shipped compliant with UL requirements for Damp Location fixtures.
- DU** Clear plastic dust cover.
- FEP** Flat End-plates. When sculptured end-plates are standard, product will be shipped with flat end plates instead. Applies to SPM9 only.
- GLR** Fusing (fast-blow). Electronic ballasts contain inherent electrical protection. Select GLR if code or regulation requires externally fused ballasts.
- GMF** Fusing (slow-blow). Electronic ballasts contain inherent electrical protection. Select GMF if code or regulation requires externally fused ballasts.
- SCEP** Sculptured End Cap. Please see product spec sheets for availability.
- ACG** Adjustable Cable Gripper. Allows you to shorten overall suspension to obtain custom lengths.

OAS = Overall Suspension

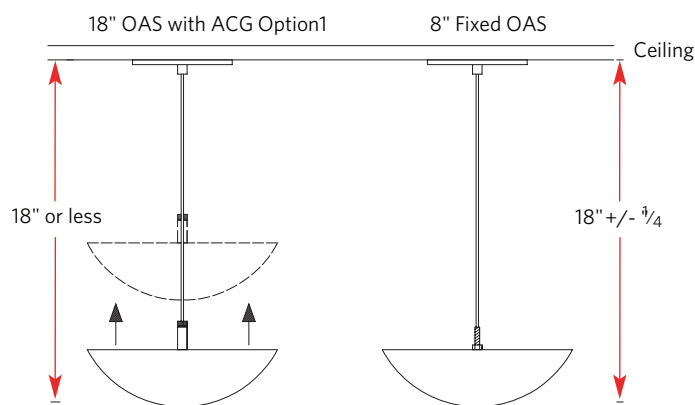

Peerless[®] Fixture Options

General Options

- MCS** Match Canopy at Support. Increases the canopy diameter on support locations to match the default power feed canopy diameter. For F1 that's 3.5" in diameter and for F2 it's 5.0" in diameter.
- OJB** Offset J-box (adjacent to support location.) Provides a support connection kit and a separate power feed kit with two additional feet of power cable to accommodate an offset J-box.

